


KMS-701**WHEATSTONE BRIDGE TRAINER**

- One LED indicator to indicate Power input.
- 10K Ω potentiometer (PT1) is a helical 10 turn pot mounted with dial for easy measurement.
- Fixed Resistance 10M Ω , 1M Ω , 100K Ω , 10K Ω , 1K Ω , 100 Ω & 10 Ω available through Selector Switch (PT2).
- Separate Fixed Unknown Resistance is provided.
- On Board circuit
 - ~ Wheatstone Bridge
- Variable Power DC supply: 0-15V / 500 m.A.
- All interconnections are made using 2mm banana Patch cords.
- Bare board Tested Glass Epoxy PCB is used.
- Set of 2mm Patch cords for interconnections.
- Test points are provided to analyze signals at various points.
- Attractive ABS Plastic enclosure.
- User Manual.

Note: Photos are only indicative and are subject to change with specifications. Specifications and Photos can be altered without prior notice in our constant efforts for improvement.

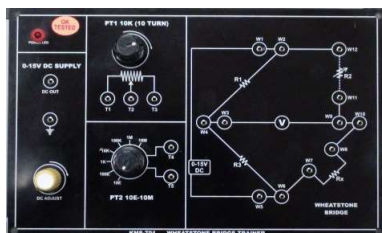